




其獨特的內置裝置，適用於多種模胚尺寸和不同闔的厚度。  
 硬化鋼的零件，確保很長的使用壽命。插銷裝置容易定時安裝。  
 鎖模扣的內置安裝，可以選免運水接頭和外部安裝零件的衝突。

Its unique internal design apply to kinds of mold base and mold plates, Its components made of vulcanized steel to make sure long service life. plug device is eqsy to be installed timely.  
 latch lock's internal installation can prevent the conflict between joints and external components.

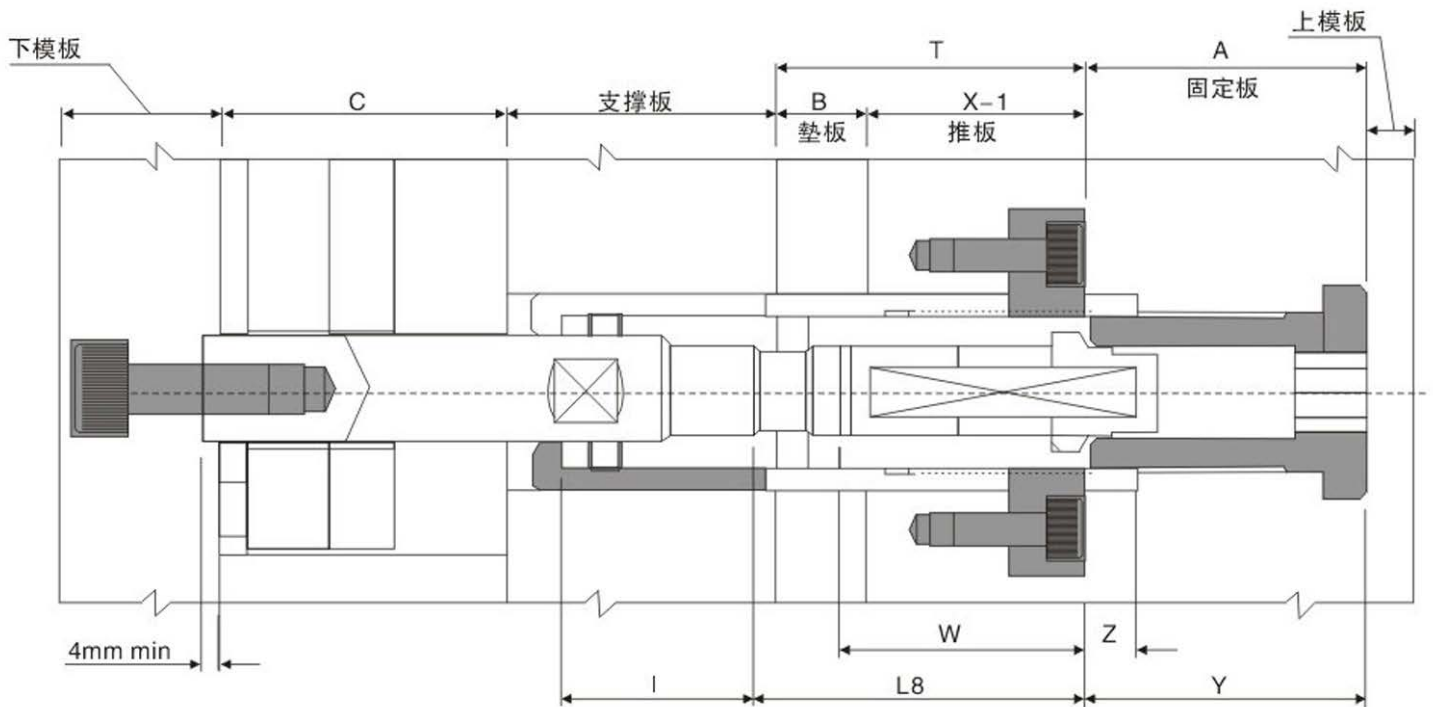

| 插銷尺寸(φ)  | 型号       | T 行程範圍<br>Min./Max. | 中心拉銷<br>長度配置 | 建議模胚<br>最大尺寸 | 拉力 (kgf) |         | 尺寸 |        |            |               |
|----------|----------|---------------------|--------------|--------------|----------|---------|----|--------|------------|---------------|
|          |          |                     |              |              | Static   | Dynamic | L8 | W      | Y          | Z             |
| 28<br>小型 | DDKL2811 | 5- > 30             | 140          | 296          | 1000     | 100     | 40 | 23±0.1 | 22- > 35   | 10 +0.04<br>0 |
|          | DDKL2812 |                     | 250          |              |          |         |    |        |            |               |
|          | DDKL2821 | 30- > 55            | 140          |              |          |         |    |        |            |               |
|          | DDKL2822 |                     | 250          |              |          |         |    |        |            |               |
| 34<br>中型 | DDKL3411 | 6- > 41             | 160          | 396          | 2000     | 200     | 51 | 32±0.1 | 27- > 47.6 | 12+0.04<br>0  |
|          | DDKL3412 |                     | 280          |              |          |         |    |        |            |               |
|          | DDKL3421 | 41- > 76            | 160          |              |          |         |    |        |            |               |
|          | DDKL3422 |                     | 280          |              |          |         |    |        |            |               |
| 45<br>大型 | DDKL4511 | 12- > 58            | 200          | 596          | 3000     | 380     | 68 | 43±0.1 | 35- > 60   | 16+0.04<br>0  |
|          | DDKL4512 |                     | 310          |              |          |         |    |        |            |               |
|          | DDKL4521 | 58- > 104           | 200          |              |          |         |    |        |            |               |
|          | DDKL4522 |                     | 310          |              |          |         |    |        |            |               |

2D下載

3D下載

返回索引