


## 大水口標準特殊注口襯套(Φ120)

Big water spigot standard special sprue bushing(Φ120)



JH029-1

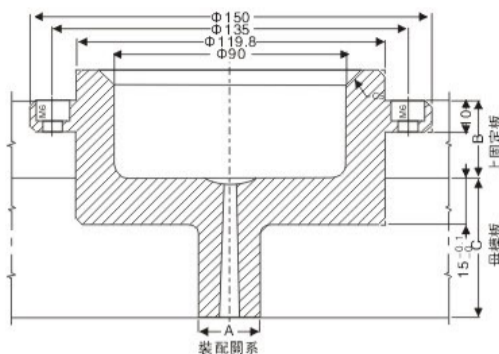

**說明 / Denote:**

一、適用成型機規格: 450T~1000T噴嘴機械孔(Φ120)

二、适用于大水口標準模胚系列

三、優點介紹:

- 1).定位環與灌嘴保證同心, 射出噴嘴決不漏料;
- 2).有效減短料頭長度, 降低廢料成本, 且利于成型;
- 3).采用標準化設計制造, 交貨迅速, 經濟實用;
- 4).使用材質: 鉻鋼;
- 5).可依模具實際規格及特殊要求量身定做。

四、標準規格及價目對照表: (右表所示)

I. Apply to machine's specification:450T-1000T(Φ120)

II.Apply to big water spigot standard mold embryo.

III.Merit:


- 1).Locating ring and sprue bushing concentric,do not leak material when ejecting.
- 2).Can reduce material head's length and reduce cost efficacious,and be propitious to molding.
- 3).Adopt standard design manufacture,delivery ontime,economic and with practicabrilty.
- 4).Material:Nobelium steel.
- 5).Special product is available per the mold's specification.

IV.Standard specification and price list:(as list on right)


A	B	C	A	B	C
Φ 16~20	50/60	50	Φ 25	50/60	50
		75			75
		100			100
		125			125
		150			150
Φ 20~25	50/60	50	Φ 30	50/60	50
		75			75
		100			100
		125			125
		150			150

## 大水口標準特殊注口襯套(Φ120)

Big water spigot standard special sprue bushing(Φ120)



JH029-2

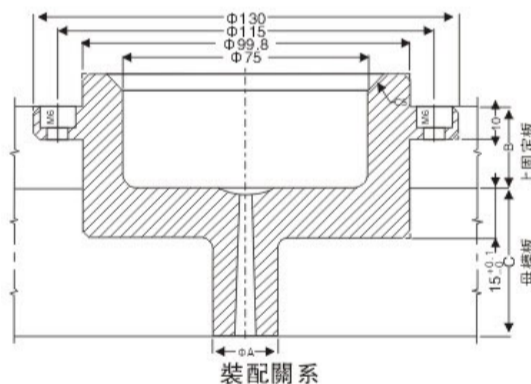

**說明 / Denote:**

一、適用成型機規格: 90T~450T噴嘴機械孔(Φ100)

二、适用于小水口標準模胚系列

三、優點介紹:

- 1).定位環與灌嘴保證同心, 射出噴嘴決不漏料;
- 2).有效減短料頭長度, 降低廢料成本, 且利于成型;
- 3).采用標準化設計制造, 交貨迅速, 經濟實用;
- 4).使用材質: 鉻鋼;
- 5).可依模具實際規格及特殊要求量身定做。

四、標準規格及價目對照表: (右表所示)

Denote

I. Apply to machine's specification:90T-450T(Φ100)

II.Apply to two plate mold standard embryo.

III.Merit:

- 1).Locating ring and sprue bushing concentric,do not leak material when ejecting.
- 2).Can reduce material head's length and reduce cost efficacious,and be propitious to molding.
- 3).Adopt standard design manufacture,delivery ontime,economic and with practicability.
- 4).Material:Nobelium steel.
- 5).Special product is available per the mold's specification.

IV.Standard specification and price list:(as list on right)

A	B	C	A	B	C
Φ 12~16	25/30	50	Φ 20	30/35	50
		75			75
		100			100
		125			125
		150			150
Φ 16~20	25/30	50	Φ 25	30/35	50
		75			75
		100			100
		125			125
		150			150